

Supco**D I G I T A L****CR87B**

TEMPERATURE RECORDER

Designed for a variety of applications including Refrigeration and Air Conditioning.

ADVANCED MICROCONTROLLER DESIGN

LARGE LED DIGITAL TEMPERATURE DISPLAY

3 TEMPERATURE RANGES AND 4 CHART SPEEDS

FRONT PANEL SELECTABLE SINGLE TURN OR CONTINUOUS CHART ROTATION

ALL CONTROLS ARE LOCATED ON THE FRONT PANEL FOR FAST AND EASY SETUP

FURNISHED COMPLETE WITH 2 CARTRIDGE PENS AND 60, 6" DIAMETER ASSORTED CHARTS

STANDARD 120 VOLT OPERATION (220 VOLT OPTIONAL)

BATTERY BACKUP

Assures normal operation during power interruptions

12 VOLT OPERATION

Allows use in vehicular or marine operations


REMOTE READING, 4" LONG, SUBMERSIBLE STAINLESS STEEL PROBE WITH 15' CABLE

CONVENIENT FOLD-DOWN HANDLE

FREESTANDING OR WALL MOUNTED (using existing keyhole slots located on back of case)

DURABLE POLYCARBONATE CASE, COVER AND HANDLE


The SUPCO CR87B Temperature Recorder with remote sensor employs advanced microcontroller design that enables this versatile instrument to accurately measure and record temperatures in air, gas, liquids, powders, solids and semisolids. Recordings can be made from any distance up to 100 feet away by using an optional long length cable. Two selector switches located on the face panel allow for the recording of three different temperature ranges at four different recording speeds.

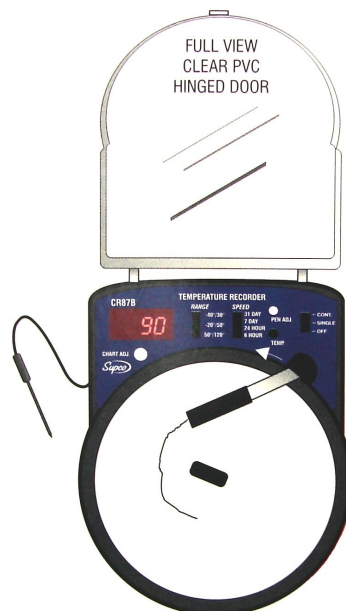

*"IT'S LIKE GETTING
12 RECORDERS IN ONE!"*



MADE IN THE
USA

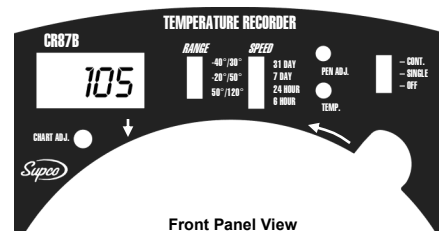

Front Panel View

Temperature Scale:	Fahrenheit Model (3 Ranges Available) -40° to +30°F, -20° to +50°F, +50° to +120°F
Temperature Scale:	Celsius Model (3 Ranges Available) -40° to 0°C, -30° to +10°C, +10° to +50°C
Relative Humidity:	96% Maximum
Temperature Accuracy:	+/- 2°F or +/-1°C
Chart Diameter:	6 Inches
Chart Speeds:	6 Hours, 24 Hours, 7 Days, 31 Days
Chart Rotation Mode:	Selectable—Single Turn or Continuous
Chart Speed Accuracy:	Better than 1%
Chart Drive:	120 VAC, 50/60 Hz
Display:	3 1/2 Digit LED 0.5
Recording Pen:	Ink Type
Temperature Probe:	15' Long Cable with 4" Stainless Steel Submersible Tip (Max 3" Immersion Depth) - part # TP15
Battery Back-up Life:	48 Hours - 8 AA Alkaline Batteries (Not Included)
Primary Power Supply:	115 VAC, 50/60 Hz. Adapter (220-240 VAC, 50/60 Hz. Optional)
Alternate Power:	12 Volt Vehicle Operation with Optional Adapter



ATLANTIC SUPPLY
 QUALITY DRILLING SUPPLIES AND
 MATERIALS TESTING EQUIPMENT
www.ScalesForBusiness.com
www.AtlanticSupply.com

Largo, FL 800-752-9416
 Riviera Beach, FL 800-535-7384
 Orlando, FL 800-569-8950
 Jacksonville, FL 888-260-5584
 Montgomery, AL 866-917-3447